


## 4 Special Clevis Sub-Assembly GTKR/SUN

---

### Product information

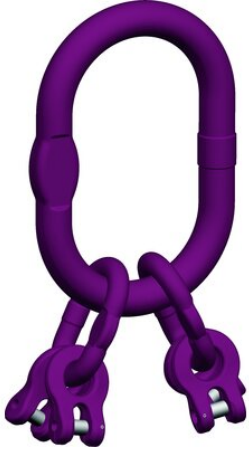

**General:** For 3 and 4-leg slings with shortening element.

[... Read more](#)

---


**Temperature range:** -40 °C up to 200 °C

**Safety factor:** 4:1

**Grade:** 12

## 4 Special Clevis Sub-Assembly GTKR/SUN

### Blueprint



### Technical data / Spare Parts

Part code	Code	Chain diameter	WLL ton	can be used with single hook acc. DIN15401 up to nr.	WLL 45- 60° ton	d mm	t mm	w mm mm	e mm	Weight kg
NRLI124H07OM	GTKR/SUN 4-7	7	5	10	3.55	27	190	110	287	4.11
NRLI124H08OM	GTKR/SUN 4-8	8	6.3	10	4.5	27	190	110	287	4.15
NRLI124H10OM	GTKR/SUN 4-10	10	10.6	12	7.5	30	190	110	326	6.62
NRLI124H13OM	GTKR/SUN 4-13	13	17	12	11.8	38	275	150	479	14.27
NRLI124H16OM	GTKR/SUN 4-16	16	25.6	12	18.3	38	275	150	503	21.25