


## Steel Wire Rope 18x7-WSC (Semi-rotation resistant)

### Product information

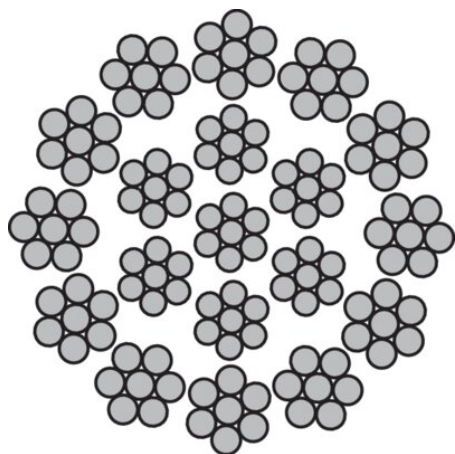

**Rope construction:** 18x7-WSC (Semi rotation resistant rope)

**Marking:** According to standard


**Standard:** EN 12385-4

**Note:** ISO 4309 Rope Category No: All Diameters RCN.23-1

**Fill factor:** 0.55

**RCN:** 23-1

Overhead cranes



## Steel Wire Rope 18x7-WSC (Semi-rotation resistant)

### Technical data / Spare Parts

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
TEKK04	4	1,960	Galvanized	sZ	10.3	6.9	A-1	6.4
TEKK05	5	1,960	Galvanized	sZ	16.1	10.8	A-1	10
TEKK06	6	1,960	Galvanized	sZ	23.1	15.6	A-1	14
TEKK07	7	1,960	Galvanized	sZ	31.5	21.2	A-1	20
TEKK08	8	1,960	Galvanized	sZ	41.1	27.7	A-1	26