
Wire rope PVC-coated 6x7, 6x19

Product information

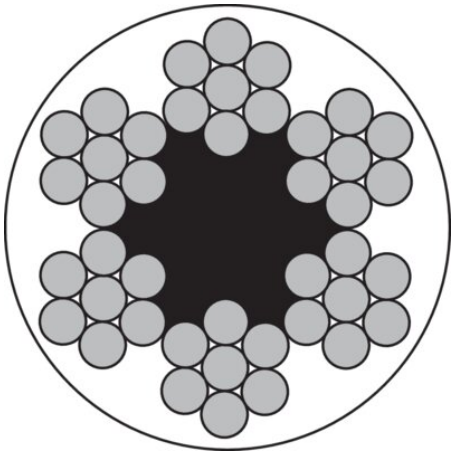

PVC-color: clear/bright
Rope constructions: 6x7+FC | 6x19+FC

... *Read more*

Rope construction: Ordinary right hand lay, 6x7 FC (fiber core)
Marking: According to standard
Temperature range: max 100°C
Standard: EN 12385-4
Note: Not for lifting

Haklift Oy
sales@haklift.com
+358 2 511 5511

© November 2026 - All Rights Reserved

Wire rope PVC-coated 6x7, 6x19

Technical data / Spare Parts

Part code	Breaking Load ton	Rope Ø mm	length per reel m
TKP23	0.24	2/3	250
TKP23100	0.24	2/3	110
TKP34	0.54	3/4	250
TKP34100	0.54	3/4	110
TKP35	0.54	3/5	250
TKP35100	0.54	3/5	110
TKP46	0.96	4/6	250
TKP46100	0.96	4/6	110
TKP57	13.8	5/7	110
TKP68100	21.6	6/8	110

Haklift Oy
sales@haklift.com
+358 2 511 5511

© November 2026 - All Rights Reserved