Load lever with roller

Product information



Load lever with roller is suitable for moving machines and equipment – it is an ideal tool for lifting (to free from the ground), shifting and positioning heavy and challenging objects in industrial maintenance, installations, etc. The function is based on a simple leverage mechanism, and the heel is equipped with metal wheels. Load lever is well suited also for use together with cargo trolleys. Lifting claw's height is 13 mm (ground clearance requirement for the object > 13 mm). Lever angle (claw – rod) is about 120°.

Lift claw height at extreme position (rod cranked to the floor) approx. 120 mm. Ergonomically efficient lifting height approx. 80 mm.

... *Read more*

Features: Iron wheels
Material: Steel
Finish: Painted, yellow
Note: Use only by human power

Haklift Oy
sales@haklift.com
+358 2 511 5511

© November 2026 - All Rights Reserved


Load lever with roller

Technical data / Spare Parts

Part code	Length mm	Width of platform mm	Lenght of platform mm	Wheel size mm	Max load kg	Diameter mm	Weight kg
SIIRTAN50	1,530	75	70	70	5,000	38	11

SPARE PARTS

Spare part (product code)	Description	Suitable for load lever (product code)
SIIRTAN50VR	"E" retaining ring for wheel axle end	SIIRTAN50

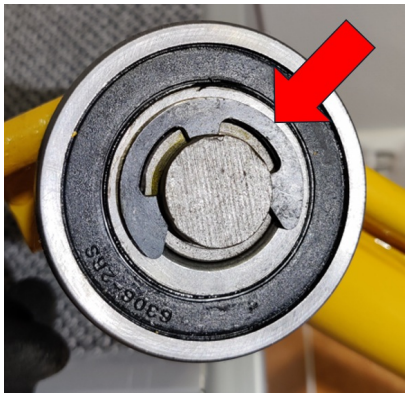

Also other spare parts available with a delivery time, ask our sales for more information

Haklift Oy
sales@haklift.com
+358 2 511 5511

© November 2026 - All Rights Reserved