

Double Swivel Ring Codipro DSR UP UNC

Product information



The DSR lifting ring is a double swivel ring. It is composed of a GRADUP lifting ring designed for rotations under load. Its double swivel ensures perfect alignment with the sling. The lifting ring can swivel 180° but has a rotating range of 360°. It can be used for any lifting configuration (straight lift, with angle, tilting, rotating).

The DSR lifting ring is equipped with a protective crossbar and is approved for all lifting configurations from 0° to 90°.

It is manufactured in compliance with the REACH regulation and is also available as female and stainless-steel, quick lift and welding version.

Complies with the Machinery Directive 2006/42/CE

[... Read more](#)

Marking: According to standard, CE-marked


Temperature range: -20°C up to +200°C

Standard: EN 1677-1
except grade/WLL

Safety factor: 5:1

Double Swivel Ring Codipro DSR UP UNC

Blueprint

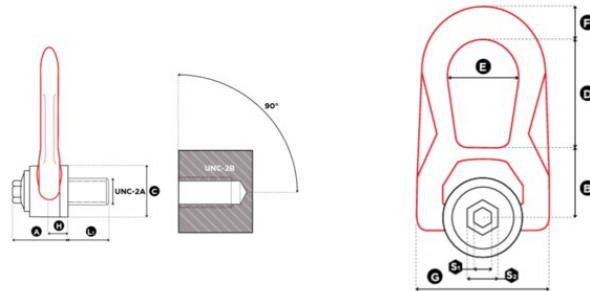

Technical data / Spare Parts

Part code	WLL ton	Thread Inch	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	L1 mm	S1 mm mm	S2 mm mm	Weight kg
NS8KL1/4DSR	0.14	1/4 -20	32	30	30	38	27	14	53	9.5	13	8	16	0.3
NS8R5/16DSR	0.45	5/16 -18	33	30	30	38	27	14	53	9.5	15	8	16	0.3
NS8KL3/8DSR	0.58	3/8 -16	33	30	30	38	27	14	53	9.5	17	8	16	0.3
NS8KL1/2DSR	1.08	1/2 -13	33	30	30	38	27	14	53	9.5	21	8	16	0.3
NS8KL5/8DSR	1.76	5/8 -11	45	40	45	53	38	17	76	13	27	8	20	0.9
NS8KL3/4DSR	2.38	3/4 -10	45	40	45	53	38	17	76	13	30	8	20	0.9
NS8KL7/8DSR	3.58	7/8 -9	62	55	60	83	55	25	115	19	33	14	24	2.5
NS8KL1DSR	5.08	1 -8	62	55	60	83	55	25	115	19	36	14	24	2.6
NS8KL11/8DSR	5.21	1 1/8 -7	62	55	60	83	55	25	115	19	42	14	24	2.6
NS8KL11/4DSR	6.12	1 1/4 -7	62	55	60	83	55	25	115	19	45	14	24	2.7