
Master Link Assembly Pewag VWI Stainless

Product information

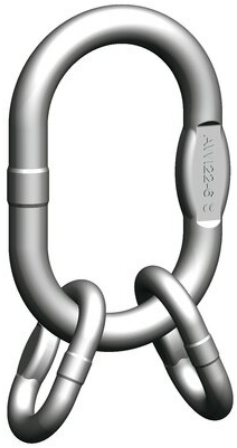

Stainless steel master link for 3- and 4-leg chainslings.

This stainless steel chain sling is electrically welded for a clean finish, stamped and ideally suited for assembling III- and IV-leg chain slings in welded or assembled systems. The dimensions are similar to DIN 5688-1.

The VWI Master link assembly is tested at 100 % of its load capacity. It is made from high-grade stainless steel with a higher resistance to acids and caustics than the standard four-leg chain slings G8, G10 and G12.

It is ideally suited for use in water and wastewater applications and can also be used in connection with chemicals and food products; however, restrictions will apply.

... *Read more*

Material: 1.4404 (AISI 316L), 1.4462 (AISI 318LN).
Marking: CE-marked
Finish: Pickled and blasted.


Safety factor: 4:1
Grade: 6

Haklift Oy
sales@haklift.com
+358 2 511 5511

© October 2026 - All Rights Reserved

Master Link Assembly Pewag VWI Stainless

Blueprint



Technical data / Spare Parts

Part code	Code	WLL ton	Consisting of	Usable up to sling hooks following DIN 15401 No.	d mm	d1 mm	e mm	t mm	t1 mm mm	w mm mm	w1mm mm	Weight kg
NRLIH6	VWI 6/7-6	2.6	AWI 16-6 + 2 BWI 13-6	2.5	16	13	164	110	54	60	25	0.91
NRLIH78	VWI 8-6	3.35	AWI 18-6 + 2 BWI 16-6	5	18	16	205	135	70	75	34	1.64
NRLIH10	VWI 10-6	5.25	AWI 22-6 + 2 BWI 20-6	6	23	20	245	160	85	90	40	3.02
NRLIH13	VWI 13-6	8.9	AWI 26-6 + 2 BWI 22-6	8	27	23	295	180	115	100	50	4.78

Haklift Oy
sales@haklift.com
+358 2 511 5511

© October 2026 - All Rights Reserved