

Chain WOX Stainless Pewag - Short Link

Product information



Stainless steel lifting chain, electrically welded and stamped, guaranteed compatible with Connex CWI connectors.

Standard: Similar DIN 5687-1

The WOX chain is particularly suited for use in water and wastewater applications. It can also be used in connection with chemicals and food products; however, restrictions will apply.

Material: 1.4404 (AISI 316L).


Marking: According to standard

Finish: Brightly polished.

Standard: EN 818-2

Safety factor: 4:1

Grade: 6

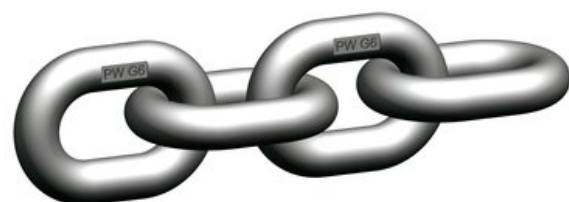

| Part code | Chain diameter mm | WLL ton | Min. breaking force kN | Model | b1 min. | b2 max. | dn mm | t mm | Weight kg/m | Delivery time days |
|-----------|----------------------|------------|---------------------------|----------|---------|---------|----------|---------|----------------|-----------------------|
| NKHK6 | 6 | 0.9 | 37.5 | WOX 6-6 | 8 | 21.5 | 6 | 18 | 0.88 | 1 |
| NKHK8 | 8 | 1.6 | 63 | WOX 8-6 | 10.8 | 28.6 | 8 | 24 | 1.53 | 1 |
| NKHK10 | 10 | 2.5 | 100 | WOX 10-6 | 13.5 | 36 | 10 | 30 | 2.4 | 1 |
| NKHK13 | 13 | 4.25 | 170 | WOX 13-6 | 17.5 | 46.8 | 13 | 39 | 4.05 | 1 |

Blueprint

