


Geared trolley

Produktinformation

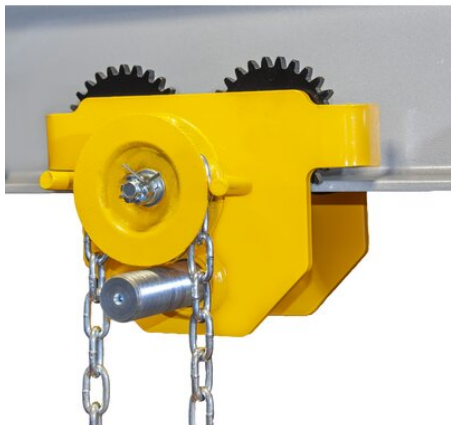

Geared trolley for IPE and T beams. The trolley moves on the beam by pulling the hand chain. The wheels are equipped with duration lubricated ball bearings. The width of the trolley can be adjusted by a threaded rod (10 and 20 t models with washers, in the picture). The hoist or lifter can be attached directly to the trolley eye with a hook or a shackle.

[... Read more](#)


Märkning: Enligt standard, CE-märkning

Standard: EN 13157

Säkerhetsfaktor: 4:1

Geared trolley

Ritning & mått



Lyfttabell

Art.nr	Max last (WLL) ton	Beam width mm	Min. kurvradie mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	Vikt kg
SIVA05HKS	0,5	50-220	500	352,5	198	158	12,5	40	~3	55	75	28	8,5
SIVA05HLKS	0,5	50-305	500	437,5	198	158	12,5	40	~3	55	75	28	8,9
SIVA10HKS	1	58-220	700	353,5	238	183	17	31	~3	68	95	37	12,5
SIVA10HLKS	1	58-305	700	438,5	238	183	17	31	~3	68	95	37	13
SIVA20HKS	2	66-220	900	362	277	208	20	31	~3	80	108	48	17
SIVA20HLKS	2	66-305	900	447	277	208	20	31	~3	80	108	48	17,8
SIVA30HKS	3	74-220	1 200	406,5	324	249	26	31	~3	100	131	56	28
SIVA30HLKS	3	74-305	1 200	491,5	324	249	26	31	~3	100	131	56	29,1
SIVA50HKS	5	90-220	1 000	434,5	373	296,5	28	40	~5	120	154	65	45
SIVA50HLKS	5	90-305	1 000	519,5	373	296,5	28	40	~5	120	154	65	46,1
SIVA100HKS	10	125-203	1 300	487,5	455	490	82	36,5	~5	-	-	120	93
SIVA100HLKS	10	125-305	1 300	589,5	455	490	82	36,5	~5	-	-	120	95
SIVA200HKS	20	136-203	4 700	523	642	622	110	54	~5	-	-	150	247,5
SIVA200HLKS	20	136-305	4 700	625	642	622	110	54	~5	-	-	150	250