

Lifting chain, grade 100


Produktinformation

Short link grade 100 lifting chain. With similar chain size approximately 30% higher workload compared to grade 80 lifting chain..

The chain is also available for operating temperatures -30 - (+)380 °C, ask for more.

Säkerhetsfaktor: 4:1

Klass: 10

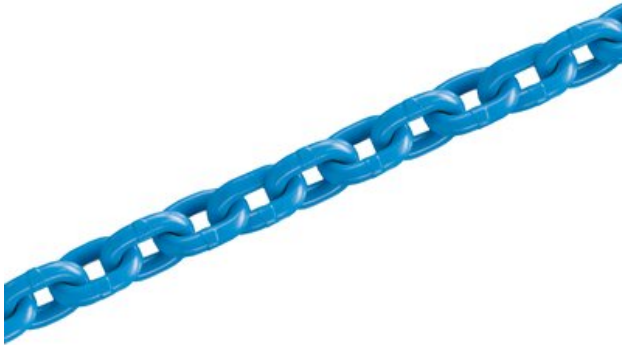

Art.nr	Kätting Ø mm	Max last (WLL) ton	A mm	B, mm	D mm	Vikt kg/m	Ca. levtid (arbetsdagar)
NK106	6	1,4	18	9	6	0,96	1
NK108	8	2,5	24	11	8	1,57	1
NK1010	10	4	30	14	10	2,46	1
NK1013	13	6,7	39	18	13	4,18	1
NK1016	16	10	48	22	16	6,28	1
NK1020	20	16	62	25,6	20	10,1	1
NK1022	22	19	66	30	22	11,88	1
NK1026	26	26,5	78	35	26	16,18	1
NK1032	32	40	96	41,6	32	24,1	14

Ritning & mått

