


## Stållina 6x36WS-FC

### Produktinformation



[... Read more](#)

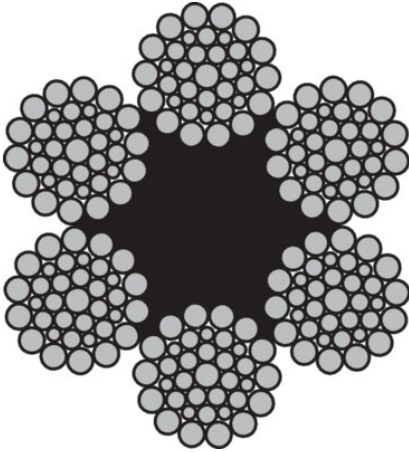

**Konstruktion:** 6x36WS-FC (216-trådig)

**Märkning:** Enligt standard

**Standard:** EN 12385-4


**Fyllnadsfaktor:** 0.5

**RCN:** 09

Redskap



Telfer/ Travers



## Stållina 6x36WS-FC

### Lyfttabell

Art.nr	Lindiameter	Tråd hållfasthet N/mm <sup>2</sup>	Ytbehandling	Rope lay	Min brottkraft kN	Stålarea mm <sup>2</sup>	Smörjning	Vikt kg/100m
TEK21608	8	1 770	Galvaniserad	sZ	37,4	25,2	A-1	24
TEK21610	10	1 770	Galvaniserad	sZ	58,4	39,3	A-1	37
TEK21612	12	1 770	Galvaniserad	sZ	84,1	56,6	A-1	53
TEK21614	14	1 770	Galvaniserad	sZ	114	77	A-1	72
TEK21616	16	1 770	Galvaniserad	sZ	150	101	A-1	94
TEK21618	18	1 770	Galvaniserad	sZ	189	127	A-1	119
TEK21620	20	1 770	Galvaniserad	sZ	234	157	A-1	147
TEK21622	22	1 770	Galvaniserad	sZ	283	190	A-1	178
TEK21624	24	1 770	Galvaniserad	sZ	336	226	A-1	211
TEK21626	26	1 770	Galvaniserad	sZ	395	266	A-1	248
TEK21628	28	1 770	Galvaniserad	sZ	458	308	A-1	288
TEK21630	30	1 770	Galvaniserad	sZ	526	354	A-1	330
TEK21632	32	1 770	Galvaniserad	sZ	598	402	A-1	376