


Stållina 6x36WS-IWRC

Produktinformation

SZ G A 

[... Read more](#)

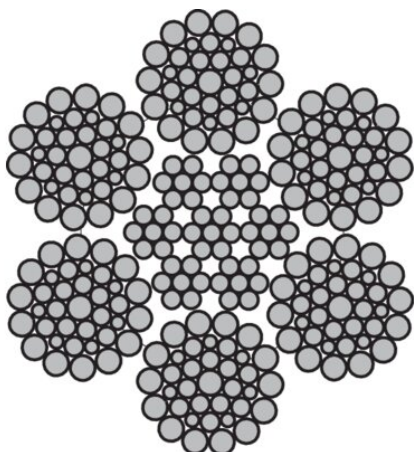

Konstruktion: 6x36WS-IWRC (265-trådig).

Märkning: Enligt standard

Standard: EN 12385-4

Fyllnadsfaktor: 0.59

RCN: 09

Redskap




Vinschlina



Staglina



Telfer/ Travers



Tornkran



Containerkran



Mobil hamnkran



Offshorekran



Bulkhanteringskran



Larvgående kran



Pålkran



Skänkkran



Stållina 6x36WS-IWRC

STS-kran



Grensletruck



RTG-kran



Stållina 6x36WS-IWRC

Lyfttabell

Art.nr	Lindiameter mm	Tråd hållfasthet N/mm ²	Ytbehandling	Rope lay	Min brottkraft kN	Stålarea mm ²	Smörjning	Vikt kg/100m
TEK26508	8	1 770	Galvaniserad	sZ	40,3	29,4	A-1	26,2
TEK26510	10	1 770	Galvaniserad	sZ	63	46	A-1	40,9
TEK26512	12	1 770	Galvaniserad	sZ	90,7	66,2	A-1	58,9
TEK26513	13	1 770	Galvaniserad	sZ	106	77,7	A-1	69,1
TEK26514	14	1 770	Galvaniserad	sZ	124	90,2	A-1	80,2
TEK26516	16	1 770	Galvaniserad	sZ	161	118	A-1	105
TEK26518	18	1 770	Galvaniserad	sZ	204	149	A-1	133
TEK26520	20	1 770	Galvaniserad	sZ	252	184	A-1	164
TEK26522	22	1 770	Galvaniserad	sZ	305	223	A-1	198
TEK26526	26	1 770	Galvaniserad	sZ	426	311	A-1	276
TEK26528	28	1 770	Galvaniserad	sZ	494	361	A-1	321
TEK26530	30	1 770	Galvaniserad	sZ	567	414	A-1	368
TEK26532	32	1 770	Galvaniserad	sZ	645	471	A-1	419