


Stållina 18x7-WSC rotationsfattig

Produktinformation



ISO 4309 Rope Category No: Alla dimensioner RCN.23-1

[... Read more](#)

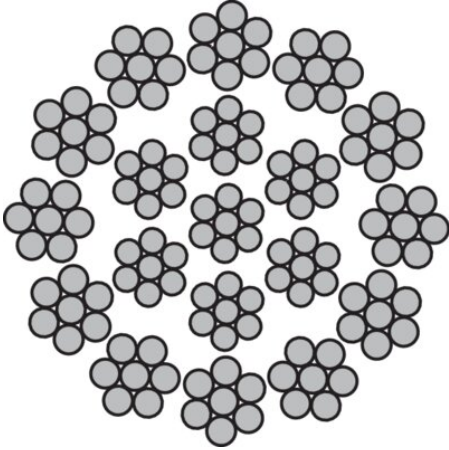

Konstruktion: Rotationsfattig, 18x7-WSC (133-trådig)


Märkning: Enligt standard

Standard: EN 12385-4

Fyllnadsfaktor: 0.55

RCN: 23-1

Telfer/ Travers



Stållina 18x7-WSC rotationsfattig

Lyfttabell

Art.nr	Lindiameter mm	Trådhållfasthet N/mm ²	Ytbehandling	Rope lay	Min brottkraft kN	Stålärea mm ²	Smörjning	Vikt kg/100m
TEKK04	4	1 960	Galvaniserad	sZ	10,3	6,9	A-1	6,4
TEKK05	5	1 960	Galvaniserad	sZ	16,1	10,8	A-1	10
TEKK06	6	1 960	Galvaniserad	sZ	23,1	15,6	A-1	14
TEKK07	7	1 960	Galvaniserad	sZ	31,5	21,2	A-1	20
TEKK08	8	1 960	Galvaniserad	sZ	41,1	27,7	A-1	26