


Steel Wire Rope 35x7 (Rotation resistant)

Produktinformation

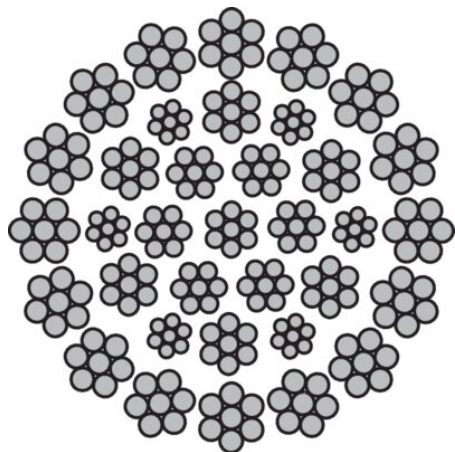

Typical applications: Hoist rope for tower cranes, mobile cranes, electrical hoists and other applications where rotation resistant rope is required.

ISO 4309 Rope Category No: All Diameters RCN.23-2

[... Read more](#)

Märkning: Enligt standard
Standard: EN 12385-4

Fyllnadsfaktor: 0.61
RCN: 23-2

Steel Wire Rope 35x7 (Rotation resistant)

Lyfttabell

Art.nr	Lindiameter mm	Trådållfasthet N/mm ²	Ytbehandling	Rope lay	Min brottkraft kN	Stålärea mm ²	Smörjning	Vikt kg/100m
ANKO08	8	2 160	Galvaniserad	sZ	48,4	30,7	A-1	29
ANKO10	10	2 160	Galvaniserad	sZ	75,6	48	A-1	45
ANKO12	12	2 160	Galvaniserad	sZ	109	69,1	A-1	65
ANKO14	14	2 160	Galvaniserad	sZ	148	94,1	A-1	89
ANKO16	16	2 160	Galvaniserad	sZ	194	123	A-1	116
ANKO18	18	2 160	Galvaniserad	sZ	245	156	A-1	147
ANKO19	19	2 160	Galvaniserad	sZ	273	173	A-1	164
ANKO20	20	2 160	Galvaniserad	sZ	302	192	A-1	182
ANKO22	22	2 160	Galvaniserad	sZ	366	232	A-1	220