


Endless webbing slings 0,5 - 10 t

Product information

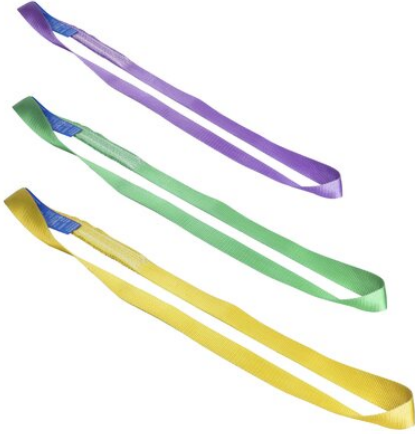

Single-layered endless webbing slings are also available with a double layer, which doubles the. Workload capacity for the same sling width.

... [Read more](#)

Features: RFID-ready

Material: 100% polyester

Marking: According to standard, CE-marked

Temperature range: -40°C - +100 °C

Standard: EN 1492-1

Note: Color coded

Warning: Standard dimensional tolerance is $\pm 3\%$. Lengths can vary within the tolerance range!.

Safety factor: 7:1

Endless webbing slings 0,5 - 10 t

Technical data / Spare Parts

Part code	WLL ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	EWL m	Webbing width mm	Colour
UNV0501	0.5	0.4	1	0.7	0.5	0.5	25	White
UNV0501.5	0.5	0.4	1	0.7	0.5	0.75	25	White
UNV0502	0.5	0.4	1	0.7	0.5	1	25	White
UNV0503	0.5	0.4	1	0.7	0.5	1.5	25	White
UNV0504	0.5	0.4	1	0.7	0.5	2	25	White
UNV0505	0.5	0.4	1	0.7	0.5	2.5	25	White
UNV0506	0.5	0.4	1	0.7	0.5	3	25	White
UNV0508	0.5	0.4	1	0.7	0.5	4	25	White
UNV0510	0.5	0.4	1	0.7	0.5	5	25	White
UNV05XX	0.5	0.4	1	0.7	0.5	-	25	White
UNV05005	0.5	0.4	1	0.7	0.5	0.25	25	White
UNV101	1	0.8	2	1.4	1	0.5	50	Violet
UNV102	1	0.8	2	1.4	1	1	50	Violet
UNV103	1	0.8	2	1.4	1	1.5	50	Violet
UNV104	1	0.8	2	1.4	1	2	50	Violet
UNV105	1	0.8	2	1.4	1	2.5	50	Violet
UNV106	1	0.8	2	1.4	1	3	50	Violet
UNV108	1	0.8	2	1.4	1	4	50	Violet
UNV110	1	0.8	2	1.4	1	5	50	Violet
UNV1XX	1	0.8	2	1.4	1	-	50	Violet
UNV201	2	1.6	4	2.8	2	0.5	60	Green
UNV202	2	1.6	4	2.8	2	1	60	Green
UNV203	2	1.6	4	2.8	2	1.5	60	Green
UNV204	2	1.6	4	2.8	2	2	60	Green
UNV205	2	1.6	4	2.8	2	2.5	60	Green
UNV206	2	1.6	4	2.8	2	3	60	Green
UNV208	2	1.6	4	2.8	2	4	60	Green
UNV210	2	1.6	4	2.8	2	5	60	Green
UNV2XX	2	1.6	4	2.8	2	-	60	Green
UNV207	2	1.6	4	2.8	2	3.5	60	Green

Endless webbing slings 0,5 - 10 t

Technical data / Spare Parts

Part code	WLL ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	EWL m	Webbing width mm	Colour
UNV301	3	2.4	6	4.2	3	0.5	90	Yellow
UNV302	3	2.4	6	4.2	3	1	90	Yellow
UNV303	3	2.4	6	4.2	3	1.5	90	Yellow
UNV304	3	2.4	6	4.2	3	2	90	Yellow
UNV305	3	2.4	6	4.2	3	2.5	90	Yellow
UNV306	3	2.4	6	4.2	3	3	90	Yellow
UNV308	3	2.4	6	4.2	3	4	90	Yellow
UNV310	3	2.4	6	4.2	3	5	90	Yellow
UNV3XX	3	2.4	6	4.2	3	-	90	Yellow
UNV402	4	3.2	8	5.6	4	1	120	Grey
UNV403	4	3.2	8	5.6	4	1.5	120	Grey
UNV404	4	3.2	8	5.6	4	2	120	Grey
UNV405	4	3.2	8	5.6	4	2.5	120	Grey
UNV406	4	3.2	8	5.6	4	3	120	Grey
UNV408	4	3.2	8	5.6	4	4	120	Grey
UNV410	4	3.2	8	5.6	4	5	120	Grey
UNV4XX	4	3.2	8	5.6	4	-	120	Grey
UNV502	5	4	10	7	5	1	150	Red
UNV503	5	4	10	7	5	1.5	150	Red
UNV504	5	4	10	7	5	2	150	Red
UNV505	5	4	10	7	5	2.5	150	Red
UNV506	5	4	10	7	5	3	150	Red
UNV508	5	4	10	7	5	4	150	Red
UNV510	5	4	10	7	5	5	150	Red
UNV5XX	5	4	10	7	5	-	150	Red
UNV602	6	4.8	12	8.4	6	1	180	Brown
UNV603	6	4.8	12	8.4	6	1.5	180	Brown
UNV604	6	4.8	12	8.4	6	2	180	Brown
UNV605	6	4.8	12	8.4	6	2.5	180	Brown
UNV606	6	4.8	12	8.4	6	3	180	Brown

Endless webbing slings 0,5 - 10 t

Technical data / Spare Parts

Part code	WLL ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	EWL m	Webbing width mm	Colour
UNV608	6	4.8	12	8.4	6	4	180	Brown
UNV610	6	4.8	12	8.4	6	5	180	Brown
UNV6XX	6	4.8	12	8.4	6	-	180	Brown
UNV802	8	6.4	16	11.2	8	1	240	Blue
UNV803	8	6.4	16	11.2	8	1.5	240	Blue
UNV804	8	6.4	16	11.2	8	2	240	Blue
UNV805	8	6.4	16	11.2	8	2.5	240	Blue
UNV806	8	6.4	16	11.2	8	3	240	Blue
UNV808	8	6.4	16	11.2	8	4	240	Blue
UNV810	8	6.4	16	11.2	8	5	240	Blue
UNV8XX	8	6.4	16	11.2	8	-	240	Blue
UNV1002	10	8	20	14	10	1	300	Orange
UNV1003	10	8	20	14	10	1.5	300	Orange
UNV1004	10	8	20	14	10	2	300	Orange
UNV1005	10	8	20	14	10	2.5	300	Orange
UNV1006	10	8	20	14	10	3	300	Orange
UNV1008	10	8	20	14	10	4	300	Orange
UNV1010	10	8	20	14	10	5	300	Orange
UNV10XX	10	8	20	14	10	-	300	Orange