


Steel Wire Rope 6x36WS-IWRC

Product information

SZ G A 

ISO 4309 Rope Category No: All Diameters RCN.09

[... Read more](#)

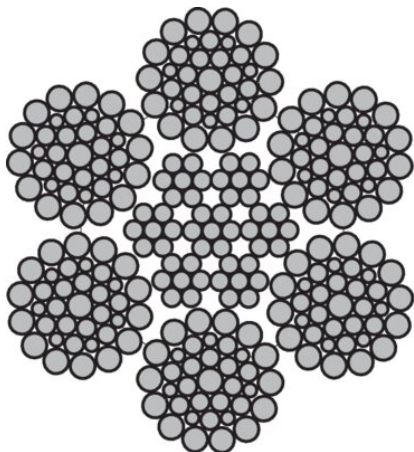

Rope construction: 6x36WS-IWRC.

Marking: According to standard

Standard: EN 12385-4

Fill factor: 0.59

RCN: 09

Slings




Winch rope



Stay rope



Overhead cranes




Tower crane



Container crane



Mobile port crane



Offshore crane



Loading crane



Crawler crane



Piling crane



Ladle crane



Steel Wire Rope 6x36WS-IWRC

STS crane



Straddle carrier



RTG



Steel Wire Rope 6x36WS-IWRC

Technical data / Spare Parts

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
TEK26508	8	1,770	Galvanized	sZ	40.3	29.4	A-1	26.2
TEK26510	10	1,770	Galvanized	sZ	63	46	A-1	40.9
TEK26512	12	1,770	Galvanized	sZ	90.7	66.2	A-1	58.9
TEK26513	13	1,770	Galvanized	sZ	106	77.7	A-1	69.1
TEK26514	14	1,770	Galvanized	sZ	124	90.2	A-1	80.2
TEK26516	16	1,770	Galvanized	sZ	161	118	A-1	105
TEK26518	18	1,770	Galvanized	sZ	204	149	A-1	133
TEK26520	20	1,770	Galvanized	sZ	252	184	A-1	164
TEK26522	22	1,770	Galvanized	sZ	305	223	A-1	198
TEK26526	26	1,770	Galvanized	sZ	426	311	A-1	276
TEK26528	28	1,770	Galvanized	sZ	494	361	A-1	321
TEK26530	30	1,770	Galvanized	sZ	567	414	A-1	368
TEK26532	32	1,770	Galvanized	sZ	645	471	A-1	419