

Steel Wire Rope 18x7-WSC (Semi-rotation resistant)

Product information

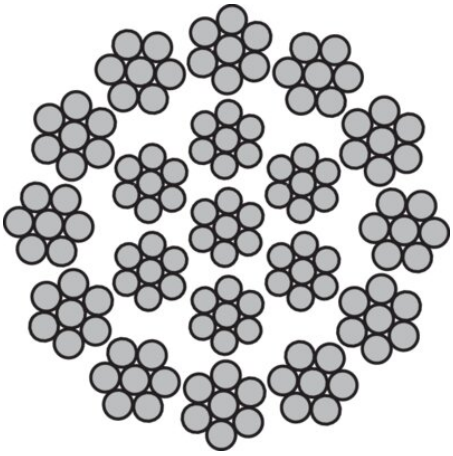

Overhead cranes



Rope construction: 18x7-WSC (Semi rotation resistant rope)
Marking: According to standard
Standard: EN 12385-4
Note: ISO 4309 Rope Category No: All Diameters RCN.23-1

Fill factor: 0.55
RCN: 23-1

Haklift Oy
sales@haklift.com
+358 2 511 5511

© November 2026 - All Rights Reserved

Steel Wire Rope 18x7-WSC (Semi-rotation resistant)

Technical data / Spare Parts

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
TEKK04	4	1,960	Galvanized	sZ	10.3	6.9	A-1	6.4
TEKK05	5	1,960	Galvanized	sZ	16.1	10.8	A-1	10
TEKK06	6	1,960	Galvanized	sZ	23.1	15.6	A-1	14
TEKK07	7	1,960	Galvanized	sZ	31.5	21.2	A-1	20
TEKK08	8	1,960	Galvanized	sZ	41.1	27.7	A-1	26

Haklift Oy
sales@haklift.com
+358 2 511 5511

© November 2026 - All Rights Reserved